

FIG. 1 is a perspective view of a circular device 100. The device has a circular top surface 120 and a central cross-shaped opening 122.

FIG. 1D is a perspective view of a screw 100'. The screw includes a head 108' and a threaded shaft 110'. The shaft is characterized by a series of longitudinal ridges 114 and grooves 102'. The tip of the screw is labeled 106'.

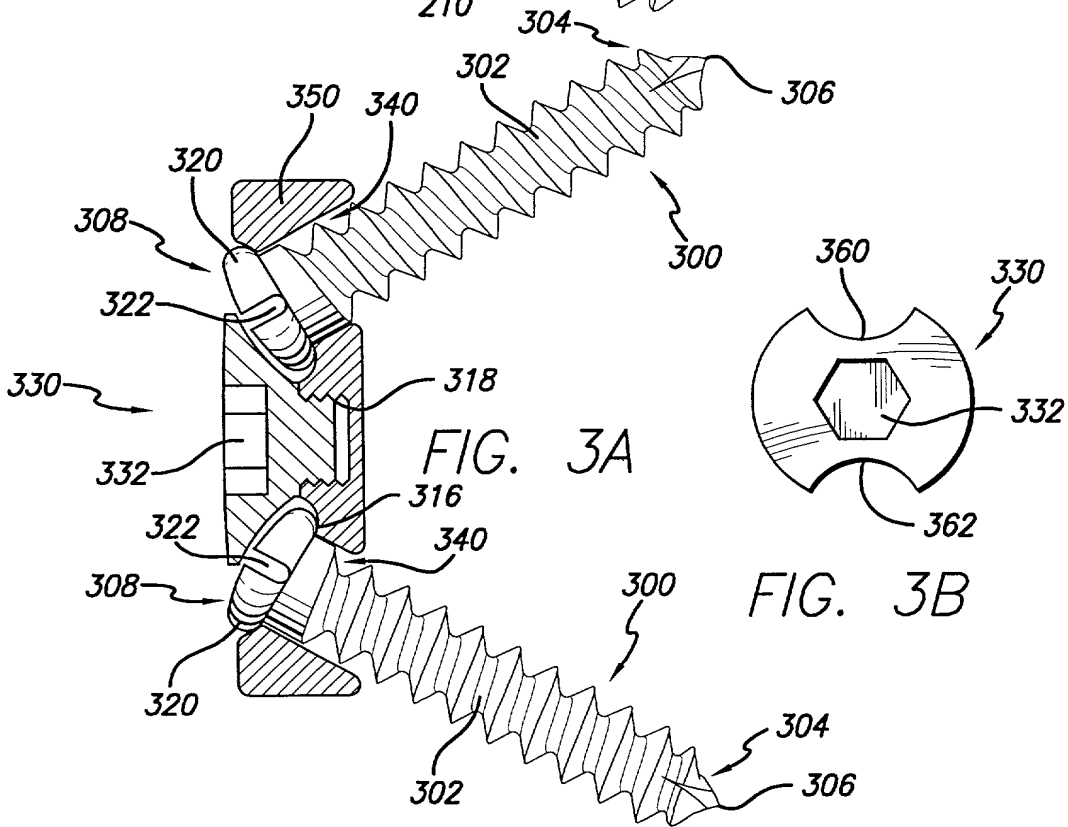
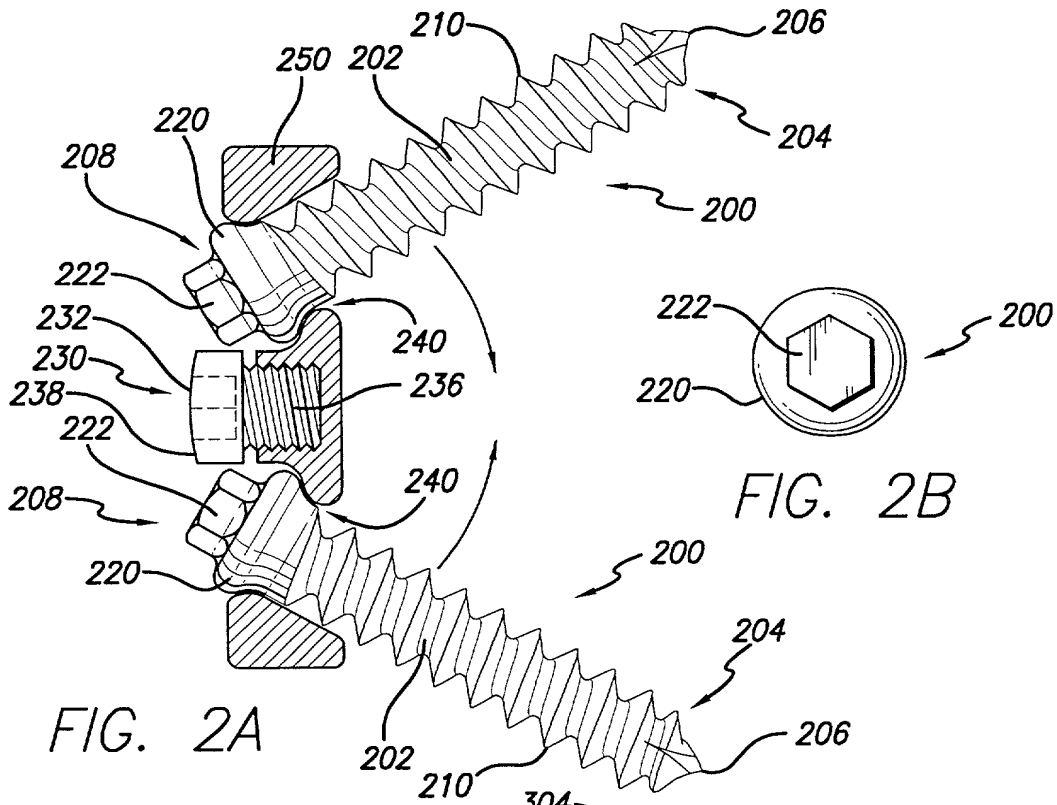


FIG. 4

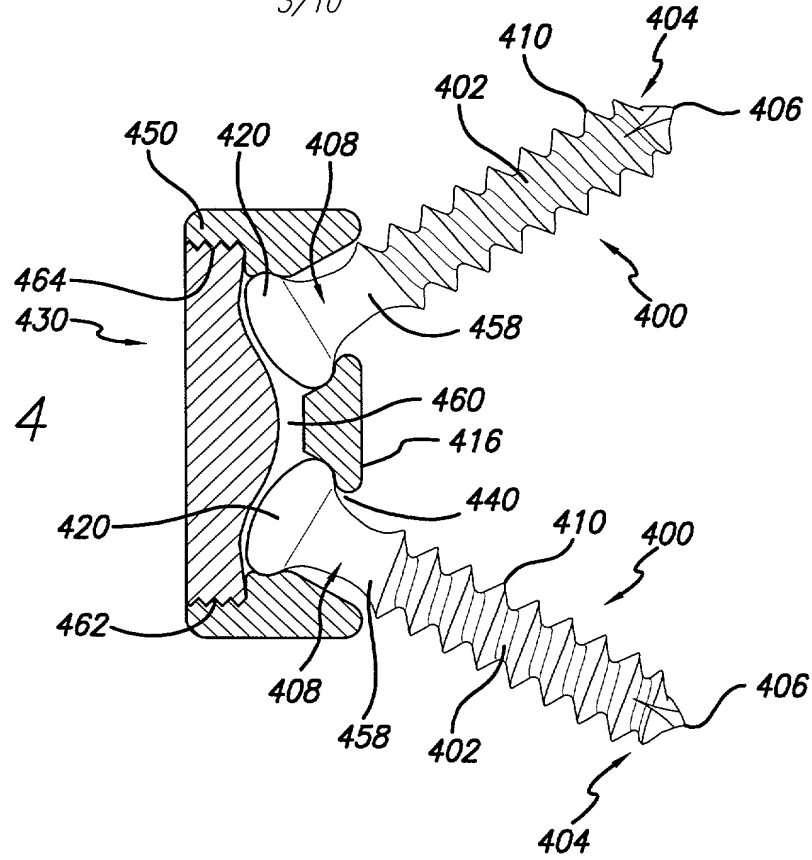


FIG. 5

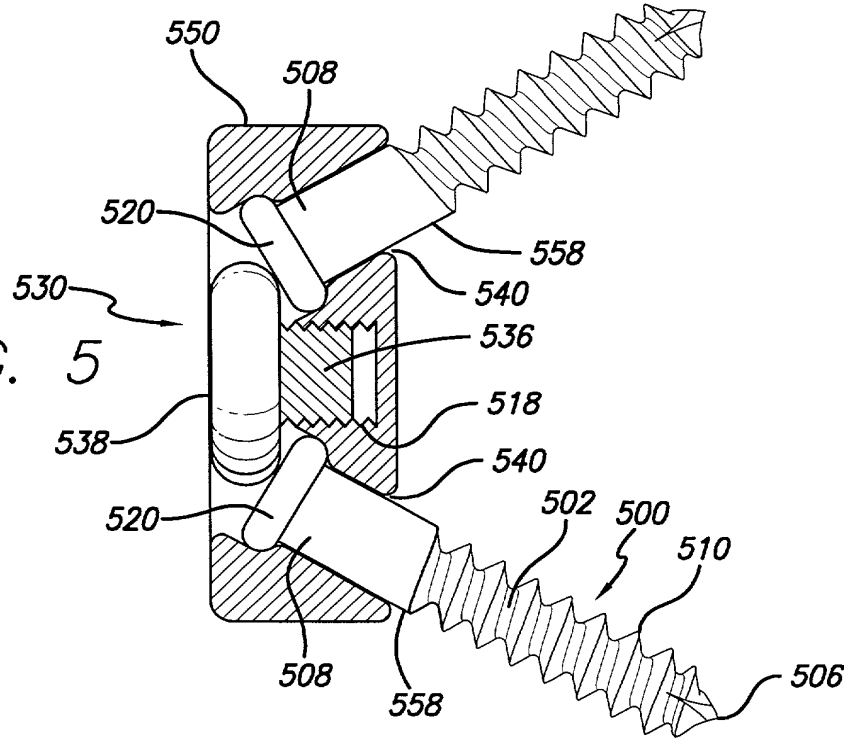


FIG. 6

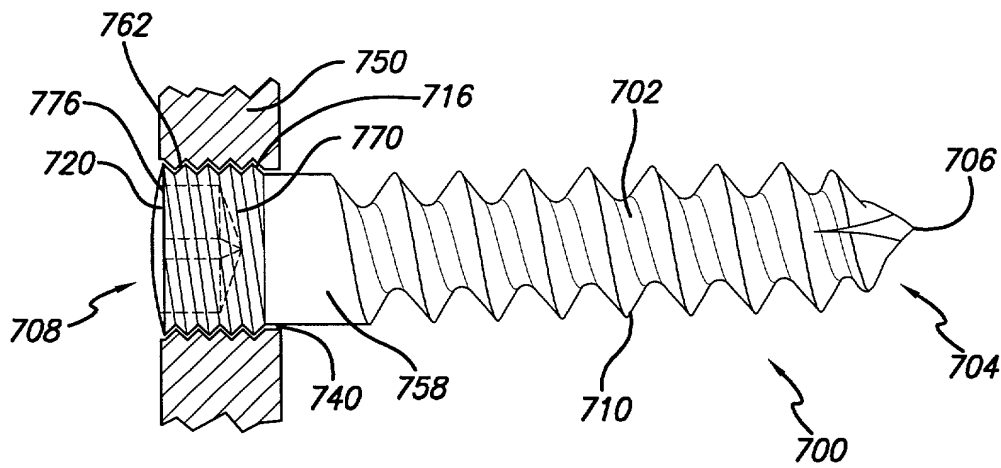
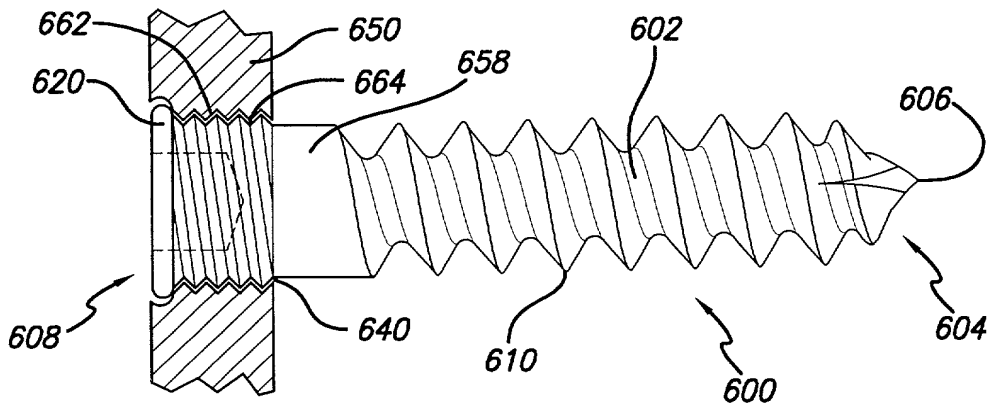


FIG. 7A

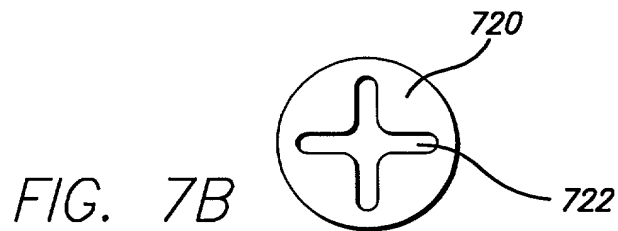


FIG. 7B

FIG. 8

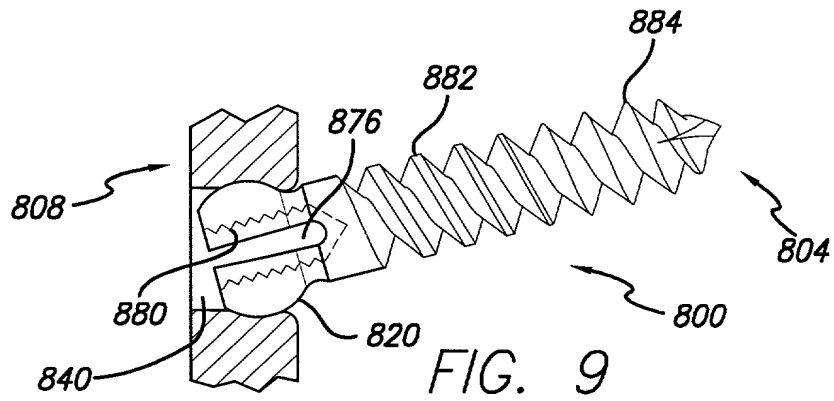
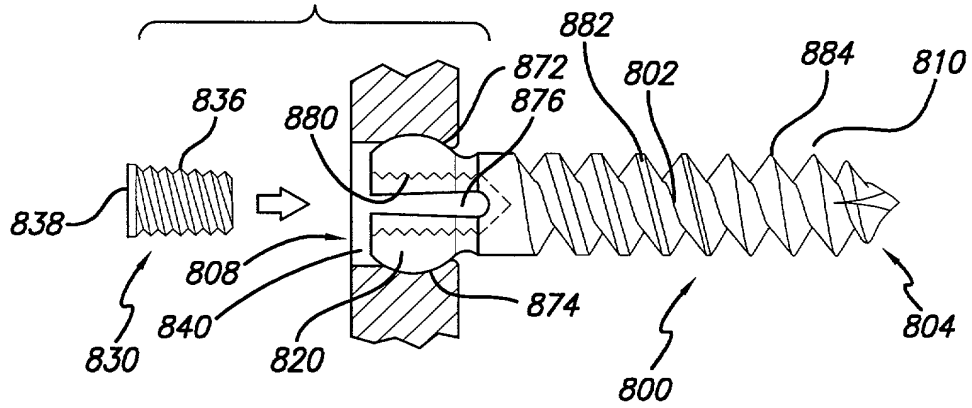


FIG. 9

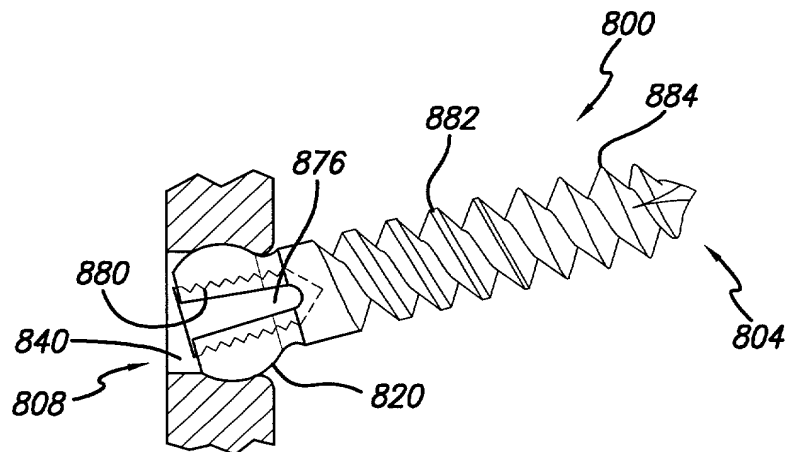


FIG. 10

FIG. 13




FIG. 14


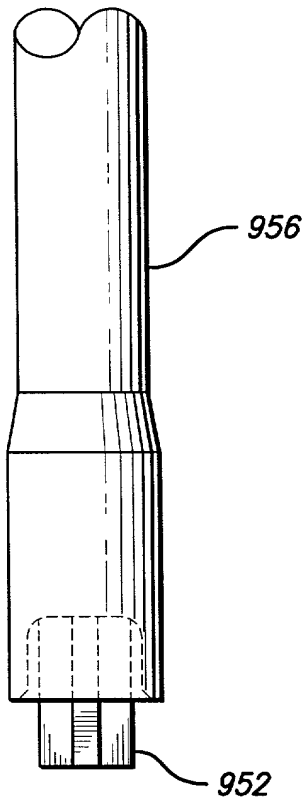


FIG. 15

FIG. 12

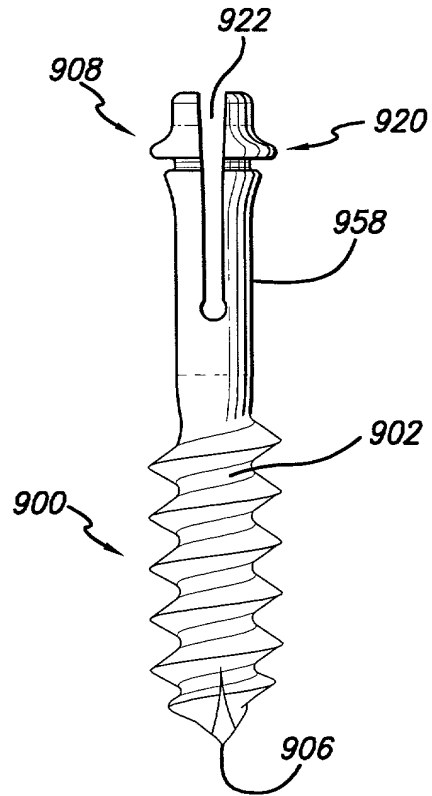




FIG. 11



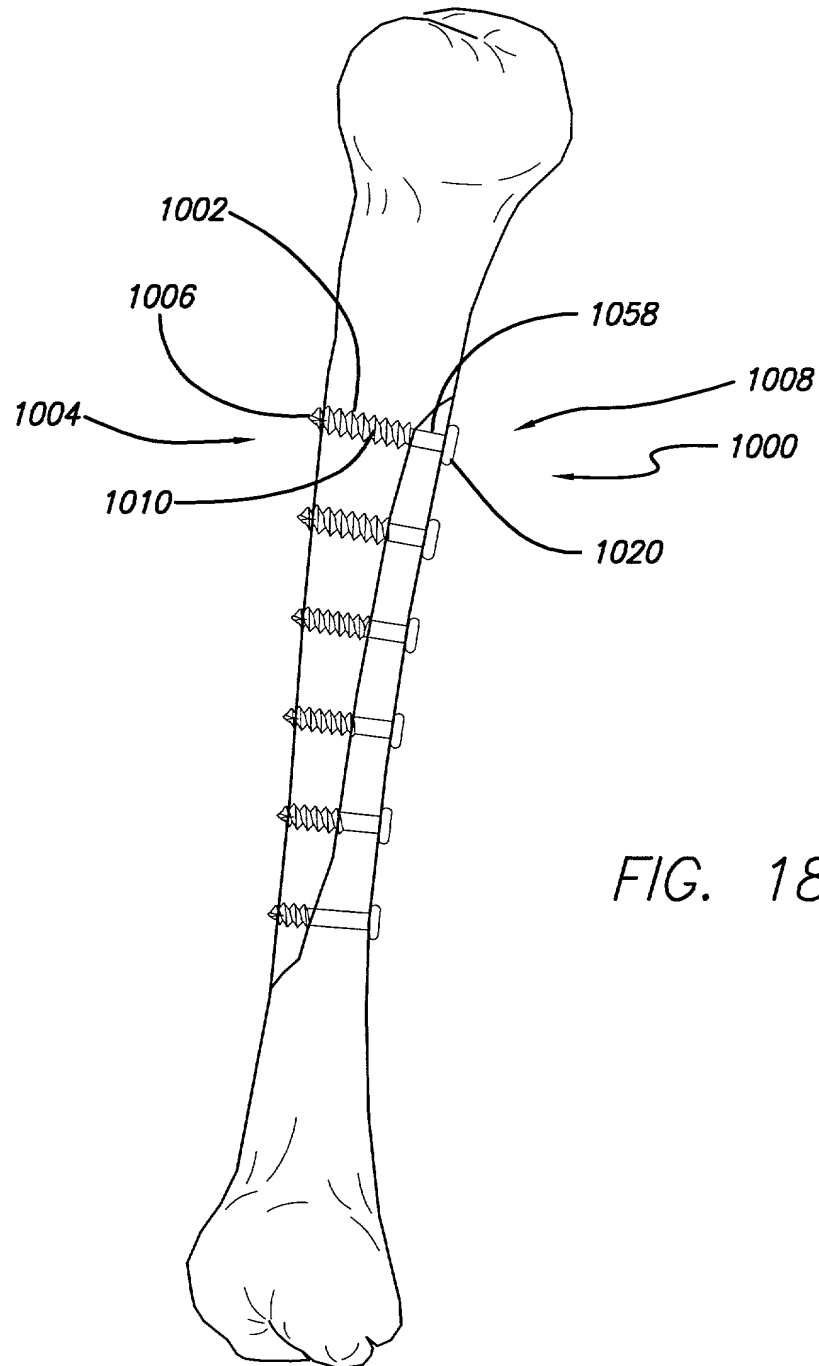


FIG. 18



FIG. 19

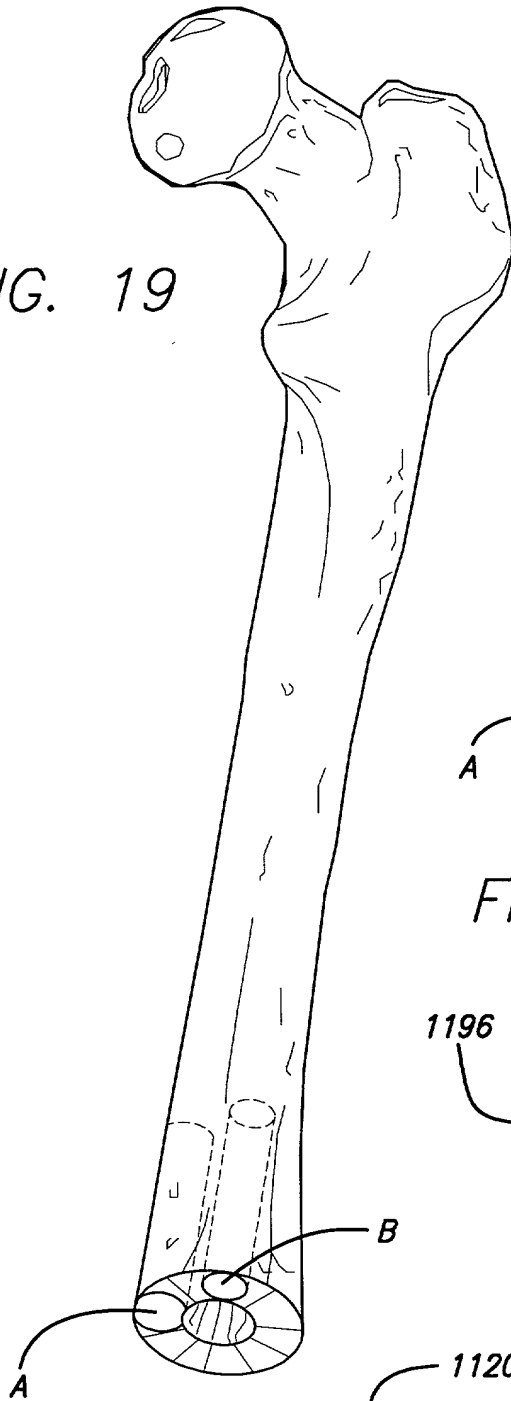


FIG. 20

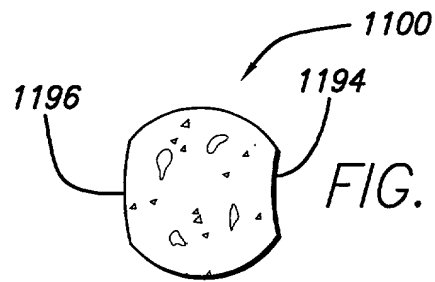
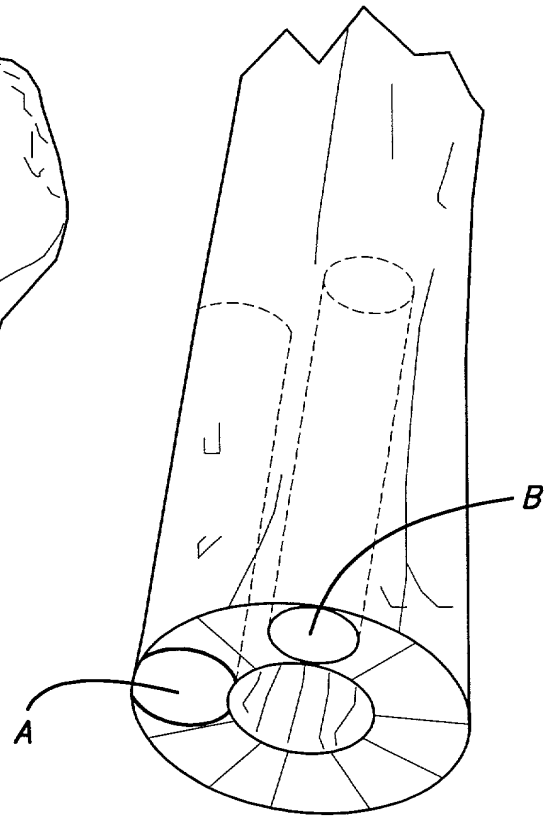


FIG. 22

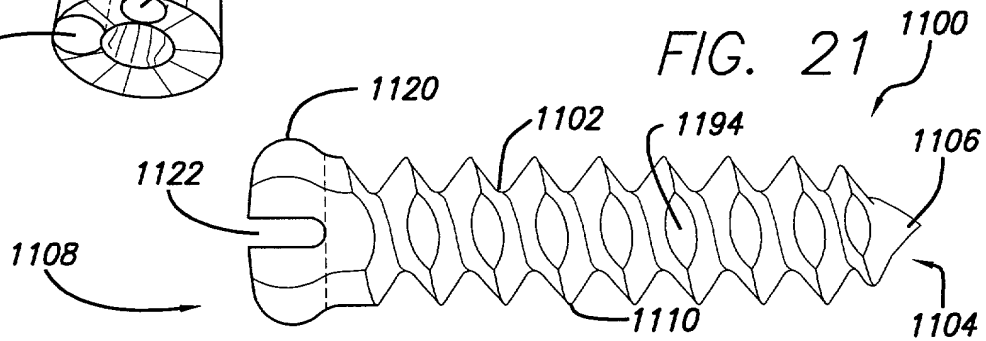


FIG. 21

10/10

FIG. 23

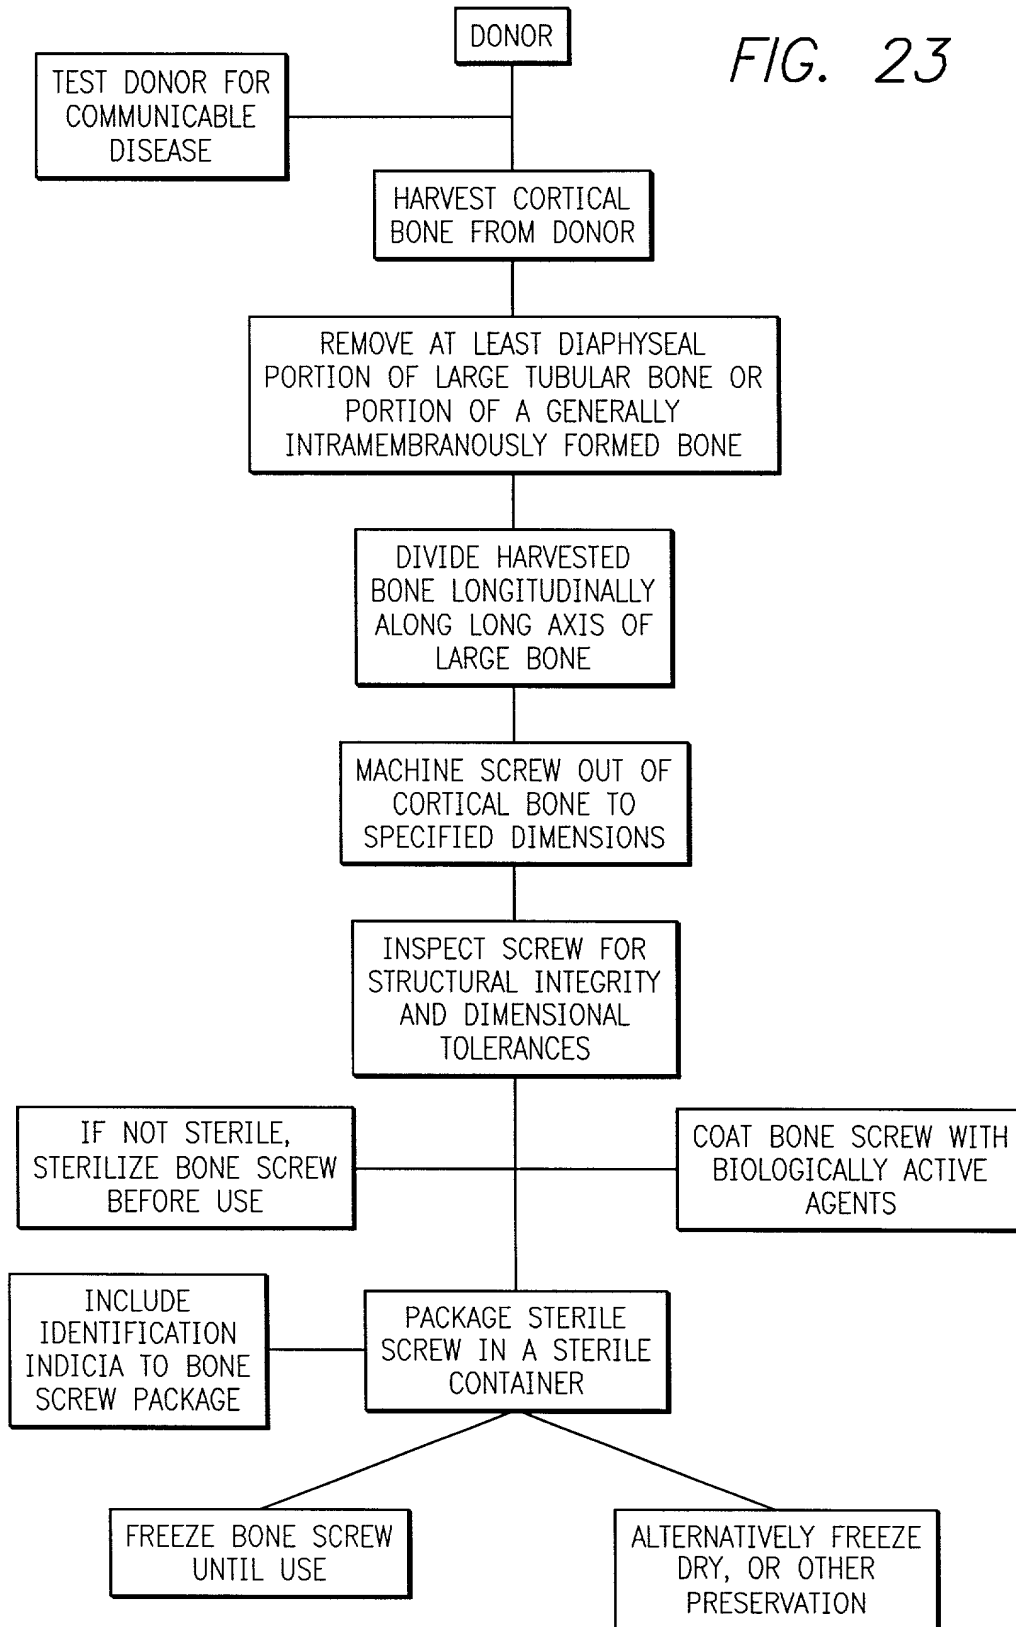


FIG. 23